



## **Our Specialized Offerings for Reconstruction and Rehabilitation of Pavements:-**

- Base and Subbase Stabilization
- Cold In Place Recycling(CIPR)/Cold Central Plant Recycling (CCPR) with Cement and Foam Bitumen/ Emulsion as per IRC 120:2015.
- Full Depth Reclamation (FDR) as per IRC 120:2015 and IRC SP 89:2018
- Rehabilitation with Glass Grid.
- Hot in Plant RAP
  - ✓ Cold RAP upto 30%
  - ✓ Hot and cold RAP upto 40% - 60%.

## About Us

Markolines was founded in 2002. We started out as a road marking company. Over the years, we have transformed this single product company into a leading Highway O&M service provider.

Today, we have a complete gamut of products under four verticals. We have established a well-equipped Technology Centre that steers the Company's goal of enhancing the on-ground performance of the technology.

We place our customer at the heart of everything we do and in all our projects, we adopt a customer-focused approach, committed to delivering a service that directly addresses the needs of our clients and the society we work in.

## Our Offerings

Highway Operations	Highway Maintenance	Specialised Maintenance Services
<ul style="list-style-type: none"><li>•Toll Operations</li><li>•Route Patrolling</li><li>•Incident Mgmt</li></ul>	<ul style="list-style-type: none"><li>•Routine Maintenance</li><li>•Preventive Maintenance</li><li>•Major Maintenance &amp; Repairs</li></ul>	<ul style="list-style-type: none"><li>•Base and Subbase Stabilization</li><li>•CIPR &amp; CCPR</li><li>•Full Depth Reclamation (FDR)</li><li>•Rehabilitation with Glass Grid.</li><li>•Hot in Plant RAP</li></ul>

## Soil Stabilization

Stabilization can increase the strength of a soil and/or control the shrink-swell properties of a soil, thus improving the load bearing capacity of a sub-grade to support pavements and foundations.

Soil Stabilization can be utilized on roadways, parking areas, site development projects, airports and many other situations where sub-soils are not suitable for construction. Stabilization can be used to treat a wide range of sub-grade materials, varying from expansive clays to granular materials. This process is accomplished using a wide variety of additives, including lime, fly-ash, and cement.

### **Benefits of Soil Stabilization process can include:**

- Higher resistance (R) values
- Reduction in plasticity
- Lower permeability
- Reduction of pavement thickness
- Elimination of excavation, exporting unsuitable material and importing new materials
- Aids compaction
- Provides "all-weather" access onto and within project sites

## Full Depth Reclamation (FDR)

Full depth reclamation is a process in which all of the asphalt pavement section and a predetermined amount of underlying materials are treated with recycling agents to produce a stabilized base course. Asphalt emulsions and/or chemical agents like fly ash or Portland cement are added as recycling agents.

The main steps include pulverization, introduction of additive, shaping of the mixed material, compaction, and application of wearing or surface course. This method of recycling is normally performed to a depth of 100 to 300 mm (4 to 12 in)

Full depth reclamation has been recommended for pavements with deep rutting, load-associated cracks, non-load associated thermal cracks, reflection cracks, and pavements with maintenance patches such as spray, skin, pothole, and deep hot mix. It is particularly recommended for pavements having a base or subgrade problem.

## Full Depth Reclamation (FDR)

### The major advantages and benefits of full depth reclamation are as follows:

- The structure of the pavement can be improved significantly without changing the geometry of the pavement and shoulder reconstruction.
- It can restore old pavement to the desired profile, eliminate existing wheel ruts, restore crown and slope, and eliminate potholes, irregularities, and rough areas. Pavement widening operations can also be accommodated in the process. A uniform pavement structure is obtained by this process.
- It can eliminate alligator, transverse, longitudinal, and reflection cracking. Ride quality can be improved.
- Frost susceptibility may be improved.
- The production cost is low, and only a thin overlay or chip seal surfacing is required on most projects.
- Engineering costs are low.
- Materials and energy are conserved, and air quality problems resulting from dust, fumes, and smoke are eliminated. The process is environmentally desirable, since disposal problem is avoided.

## Full Depth Reclamation (FDR)

**BEFORE**




**AFTER**



## Soil Modification/Stablization with Binding Agent



**Untreated Soil.  
Low CBR.  
Poor support.  
Unfit for construction.**



**Lime / Cement/Pond ash/or  
combination thereof with  
Commercial Chemical additives**



**Modified Soil.  
Increased CBR.  
Fit For Construction**



## Stabilization/ Full Depth Reclamation Process – Equipment Used

### Soil stabilization with added lime



**Binder spreader**



**Recycler**



**Single-drum  
compactor**



**Grader**



**Single-drum  
compactor**

### Soil stabilization with added cement+ Chemical Additives



**Binder  
spreader**



**Water  
Tanker**



**Recycler**



**Single-drum  
compactor**



**Grader**



**Tandem  
Roller**



**Single-drum  
compactor**



## FULL DEPTH RECLAMATION OF MDR IN NASHIK

### 1. Cement Spreading



### 2 and 3 Pulverization of soil with Recycler



### 4. Grading and Rolling



## What is CIPR

Asphalt Recycling and Reclaiming Association (ARRA) defines CIR as “**recycling of asphalt pavement without the application of heat during the recycling process to produce a rehabilitated pavement**”.

In simple words, Cold-in-Place (CIR) recycling is a method of removing and reusing the existing asphalt surface. It involves grinding off the top layer (up to 200mm) of the existing asphalt surface and mixing the crushed asphalt with foamed bitumen and placing it back down with a recycler and allied machinery.

The cold-in-place process is typically performed using a “train” of equipment which includes a water tanker, bitumen tanker, recycler, rollers and graders.

## When CIPR can be used

**CIPR can be used for rehabilitation of NH /MDR/Runways/ Port roads etc.**

**Alligator Cracks**



**Rutting (ideal candidate for CIPR)**






**Patched**



**Dry Ravelled**

## Advantages of CIPR

 <p><b>SAVINGS</b></p>	<ul style="list-style-type: none"> <li>• Aggregates from the existing pavement is re-used</li> <li>• Since the plant is at site, there is reduction in transportation and fuel costs</li> <li>• Time-saving technique, as transportation of MIX from plant to site is eliminated</li> </ul>
 <p><b>GREEN TECHNOLOGY</b></p>	<ul style="list-style-type: none"> <li>• Conservation of natural resources – as existing pavement is used, and less energy is consumed in the overall process</li> <li>• Environment friendly as emission of gases is reduced</li> </ul>
 <p><b>OTHER BENEFITS</b></p>	<ul style="list-style-type: none"> <li>• CIR overlay lasts *10-15 years as compared to 5-8 years of traditional overlay</li> <li>• Shorter construction period, due to high production capacity of recycling machines</li> <li>• Minimum traffic disruption- process is carried on one half of the road, leaving the other half open to traffic</li> </ul> <p><i>*Subject to traffic and overloading</i></p>




# Structural Rehabilitation Methods

## Option -1 (Convectional)

### Total Reconstruction


Expensive, Long Construction time, Traffic management challenges

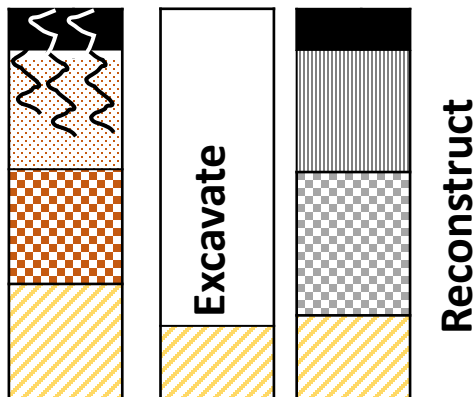

## Option -2

### Thick Asphalt Overlays


Relatively quick method, elevation problems, reflection cracking

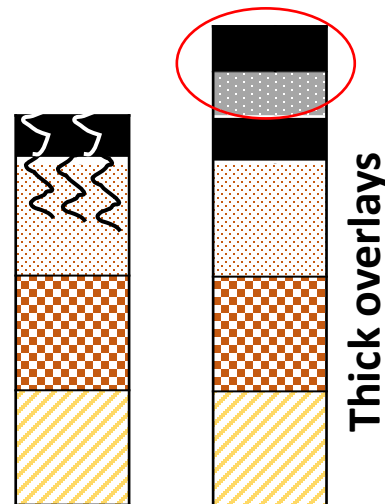

## Option -3


### CIPR

Price effective as thin asphalt overlay required on FDR Environment friendly, all distress are eliminated

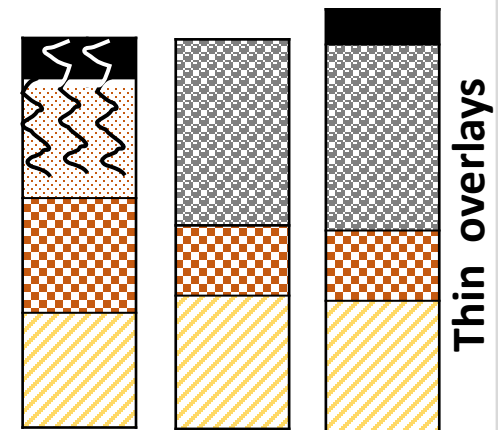

# CIPR using Foamed Bitumen and Cement - Process

## Recycling with pre-spread cement and bitumen

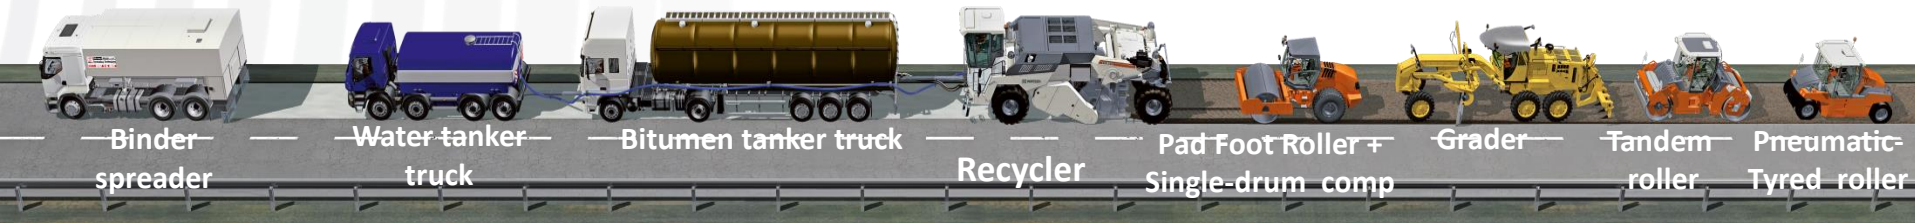

1. Cold in place recycling is carried out using specialised recycling machines, the heart of which is a milling drum equipped with a large number of hardened steel picks and the foaming attachment. The drum rotates upwards, milling the material in the existing road.
2. Based on the mix design Fresh/ virgin aggregates and Cement as a Binder is spread by Grader/ Paver on the surface. The Recycler then mills the damaged pavement wherein water from Water tanker is drawn in the Recycler by a flexible hose and is then sprayed in the mixing chamber., is mixed thoroughly with the milled material to bring it up to its optimum compaction moisture content and facilitates foaming of Bitumen, when it comes in contact with hot bitumen and compressed air. The addition of water is microprocessor based wherein exact quantity is added.
3. Recycling with foamed bitumen – it is produced onboard the recycling machine using a specialised process that adds a small percentage of water and compressed air, comes in contact with hot bitumen. Due to this the bitumen gets foamed up – expanding 20 times its original volume, which coats the aggregate.
4. The foaming process enables normal grades of bitumen to be mixed with cold, moist recycled material. In the case of granular materials, between 3% and 5% of foamed bitumen (by mass) is normally added and for recycling of old pavement it is approx. 2.5% depending on the job mix formula.
5. Behind the machine the recycled layer of material is compacted using a heavy-duty vibratory roller and profiled with a motor grader. Finally, a rubber - tyred roller is normally used to obtain a well-knitted surface finish.
6. Once compaction of the recycled layer has been completed it is cured for 2-3 days and primed before allowing traffic to ply over it to avoid damage to CIPR. An overlay is then laid as per Pavement design.



# CIPR As per IRC 120 :2015 - Foamed Bitumen – Construction Process



Spreading of Aggregate with Grader as per design proportion




Spreading of Cement with Streu Master



Milling & pulverisation by WR240 Wirtgen Recycler



The sheep foot roller for compacting top layer




Pneumatic Tyre Roller for finishing surface




Tandem roller for sealing top layer



Compaction with Single Drum smooth wheeled soil compactor

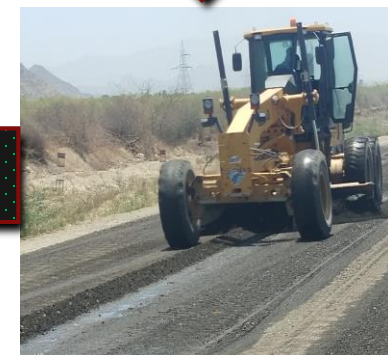

Maintaining the grade & profile of recycled surface with Grader

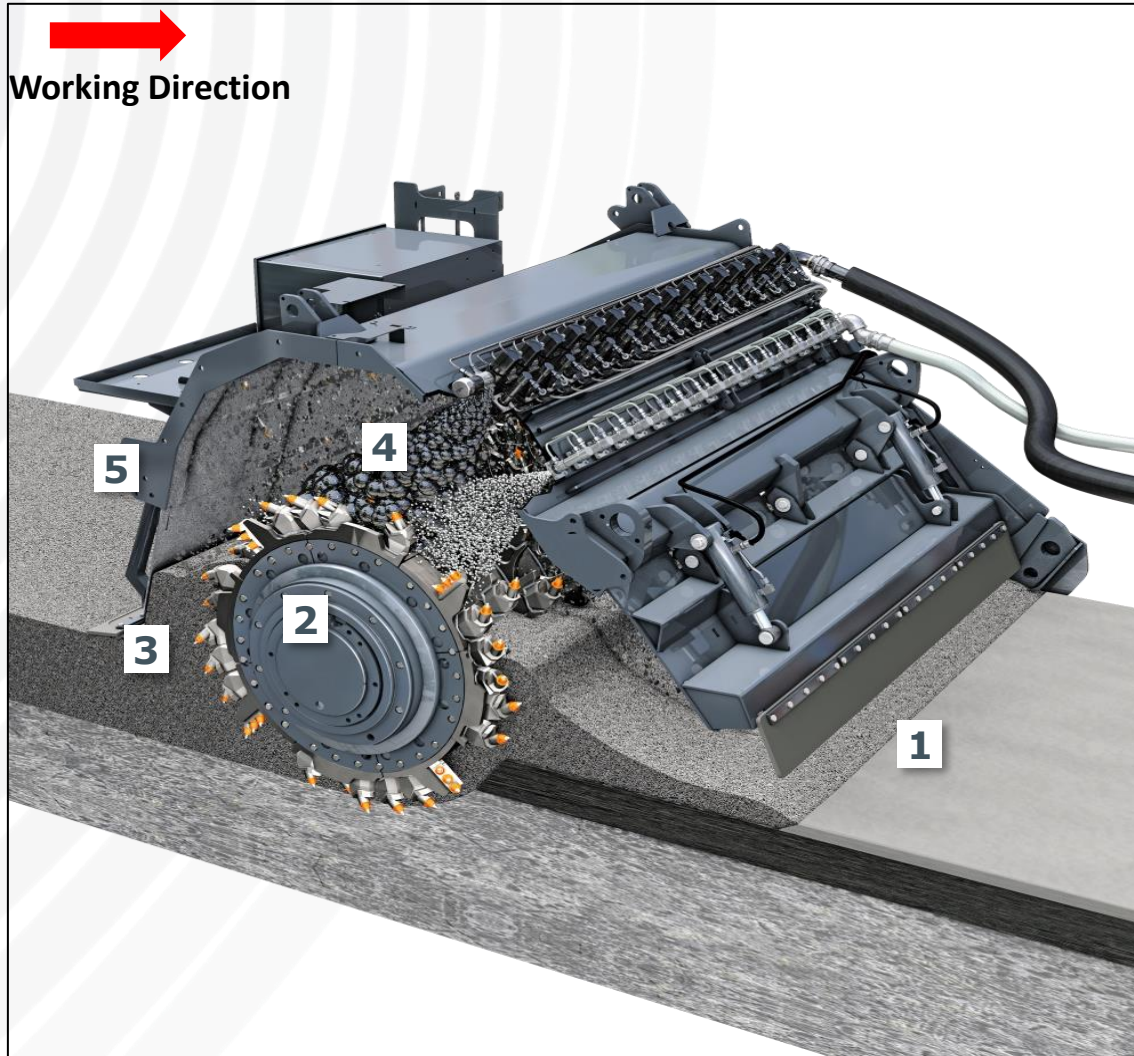

## Cold recycling

The milling and mixing rotor mills and granulates the asphalt layers. Binders and water are added via injection bars and mixed in to produce a homogeneous recycled material

1. Pre-spread Aggregate and Cement
2. Inject Water
3. Inject air resulting in Foaming of Bitumen
4. Milling and Mixing Rotor
5. Recycled, Homogeneous construction Material

## Mix-Design for CIPR

### Materials


- RAP
- Virgin Aggregate (20 mm down and Stone dust)
- Cement
- Water
- Foamed Bitumen (VG30)

### Characterization of Foamed Bitumen

Study of foamed bitumen and the variation of foam characterization (Half Life and Expansion Ratio) was carried out using Wirtgen Foam Bitumen laboratory plant, WLB-10, according to following test conditions for mix design:

Parameters	Test Conditions
Air pressure	550 kPa
Water pressure	600 kPa
Bitumen temperature	180 °C
water content	4%-8%, each 2% increment
Amount of bitumen foamed during each test	500 g @ 50g/s
Bitumen	VG-30

•**Note - Best foam having an Expansion Ratio of 16 times (minimum required 8 to 10 times) and Half life of 12 seconds (Minimum required 6 Seconds) was observed at temperature of 180 °C ( Temp. range 160 to 200 depending upon grade of bitumen) and Foaming water content of 6%.**

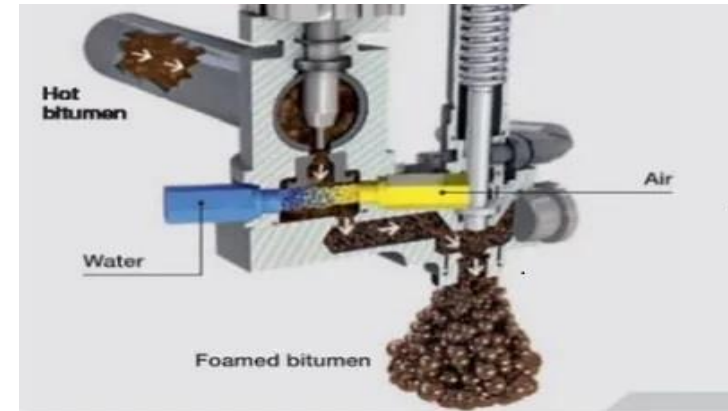

Foaming process

## CIPR using Foamed Bitumen

### Foamed Bitumen treatment is a stabilising process

- Bubbles of foam are thin films of bitumen (low viscosity) surrounding expanded water vapour (steam)
- These bubbles burst into small bitumen particles when mixed with aggregate
- Small bitumen particles can only adhere to the fine material
- The resulting mix is comprised of uncoated coarse granular particle with millions of sticky elastic “spots” in the mortar that hold aggregate together (spot welding). It is not coating of aggregates as in bitumen mixes.



## REHABILITATION OF ROAD BY GEO GRID

### Road Condition prior Geo Glass Grid work





## REHABILITATION OF ROAD BY GEO GRID

—

### After Milling And Before Laying Of Geo Grid



### Fixing Of Geo GLASS GRID





**HMP with RAP attachment...25% RAP used in DBM at MBEL Project.**



**HMP with RAP attachment...37% RAP used in DBM at FRHL Project.**





**HMP with RAP attachment...37% RAP used in DBM at FRHL Project.**





**Markolines Pavement Technologies Limited**

A Wing, 6<sup>th</sup> Floor, Shree Nand Dham,  
Sector 11, CBD Belapur, Navi Mumbai - 400 614.

Maharashtra, INDIA

EMAIL: [info@markolines.com](mailto:info@markolines.com)

Phone: +91 22 6266 1111

**Contact Person Details**

**Dr. J B Singh**

**Director**

[jb.singh@markolines.com](mailto:jb.singh@markolines.com)

+91-9820808707

**Mr. S.P. Nagarkar**

**Director -Technical**

[sp.nagarkar@markolines.com](mailto:sp.nagarkar@markolines.com)

+91-7710002487